




Fiber-Optic Ratio Thermometers









FR1 Highlights

- Fiber optic cable field-replaceable without blackbody recalibration (non laser modules)
- Laser Aiming (some models)
- Provides accurate measurement of targets that are: obstructed by smoke, steam, or particulates, moving, smaller than the instrument field of view.
- Measures from 500°C to 2500°C (932°F to 4532°F) with three models
- Fast response time down to 10 mSec
- One or two-color operation
- Simultaneous analog and digital outputs

Alarms:

- Programmable relay output (dual-temperature setpoints or "fail-safe")
- Unique "dirty window" alarm (attenuation measurement US Patent No. 5,815,410)

Communications:

- Bi-directional RS485 communications
- Supports up to 32 Marathon Series sensors on a multipoint network
- Windows® Marathon Support Software (operates under WIN 3.1/95/98/NT4 Windows 2000, XP)
- Field Calibration Software

Marathon FR1 FiberOptic ratio thermometers consist of a rugged fiber optic cable plus optical head assembly connected to a housing. The housing contains a detector, processing electronics, internal user interface/LED display, and termination connections for field wiring. FR1 thermometers permit target measurement in harsh industrial environments that are inaccessible, very hot, or located within strong electromagnetic fields.

The FR1 Optical Head consists of a small stainless steel cylindrical housing capable of withstanding ambient temperatures up to 200°C (392°F) or 315°C (600°F) (optional). The Optical Head accommodates an air-purge accessory to prevent lens contamination. The fiber optic cable is protected by stainless steel metal armor.

Specifications

Measurement

Models FR1A FR1B FR1C	Temperature Ranges 500°C to 1100°C (932°F to 2012°F) 700°C to 1500°C (1292°F to 2732°F) 1000°C to 2500°C (1832°F to 4532°F)
Detector	Si/Si-layered detector, 1 µm
Fiber Cable Lengths 1m (3'), 3m (10'), 6m (19'),	and 10m (32'); consult factory for other lengths.
Accuracy No attenuation Up to 95% attenuation Up to 95% attenuation	± (0.3% Tmeas +2°C); Tmeas in °C ± (1% Tmeas +2°C), FR1A and FR1B ± (1.3% Tmeas +2°C), FR1C
Repeatability	±1°C
Temperature Resolution	±1°C or °F
Response Time	10 mSec; averaging selectable to 10 sec
Emissivity (one-color)	0.1 to 1.0 in 0.01 increments
Slope (two-color)	0.085 to 1.150 in 0.001 increments
Signal Processing	Peak Hold, Averaging, Advanced Peak Hold

Optical

Mode	Models Field of View Minimum Spot Size @ Focus Distance				
	D:S*	CF1	CF2	SF0	
FR1A**	20:1	5mm (0.2 in) @ 102mm (4")	15mm (0.6 in) @ 305mm (12")	83mm (3.3 in) @ 1524mm (60")	
FR1B**	40:1	3mm (0.1 in) @ 102mm (4")	8mm (0.3 in) @ 305mm (12")	44mm (1.7 in) @ 1524mm (60")	
FR1C	65:1	1.6mm (0.06 in) @ 102mm (4")	5mm (0.18 in) @ 305mm (12")	27mm (1.05 in) @ 1524mm (60")	
*At 90% energy CF=close focus; SF=standard focus					

^{&#}x27;At 90% energy

Electrical


Outputs	0/4–20 mA; RS-485, 2-wire/4-wire, networkable to 32 sensors; Relay (SPST 48V, 300 mA, response time < 2 mSec)	
Power Requirements	24 VDC, 500 mA, ±20%	
Compliance	CE low voltage directive; EN 61326	

General

donoral			
Environmental Rating	NEMA-4 (IEC 529, IP 65)		
Ambient Temperature Electronics housing With water cooling option	0°C to 60°C (32°F to 140°F) 0°C to 150°C (32°F to 300°F);		
Fiber cable/Optical head Air Purge	2 I (0.5 gal) per minute 16°C (62°F) 0°C to 200°C (32°F to 392°F); standard temperature rating 0°C to 315°C (32°F to 600°F); high temperature option 0.5 to 1.5 I/sec (1-3 CFM)		
Storage Temperature Electronics housing	-20°C to 70°C (-4°F to 158°F)		
Relative Humidity	10% to 95% non-condensing		
Shock (Electronics Housing)	MIL-STD-810D (IEC 68-2-27)		
Vibration (Electronics Housing)	MIL-STD-810D (IEC 68-2-6)		
Weight Electronics Housing Optical Head	0.71 kg (25 oz) 0.10 kg (3 oz)		
Cable protection	Rated to 200°C; stainless steel armor; Viton coating, rubber "boot", and NEMA-4 (not available on high temperature cable); provision for conduit to protect		

^{**} Available with laser aiming


User Interface

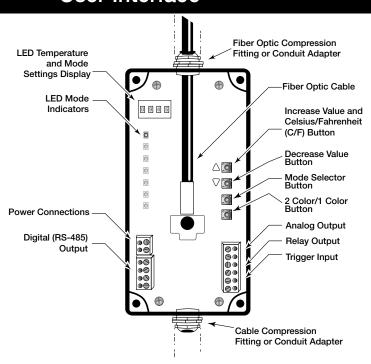


Physical Dimensions


Electronics Housing (Cooling Platform option "W" shown as a dotted line)

Mounting hole diameter 5mm (0.188 in)
Fastner head diameter 8mm (0.31 in) MAX

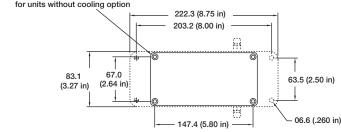

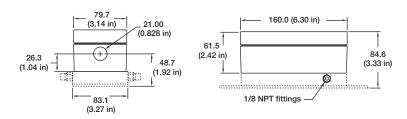

Optical Head

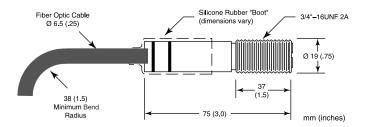

Accessories

Fiber-Optic Accessory Kit (XXXMFAK)

Adjustable mounting bracket, EMT conduit fitting for electronics housing, and rubber gland to seal fiber-cable at enclosure.

Air Purge Collar

Air purge collar and stainless steel sighting-tube, 150mm (6 in) long, 25mm (1 in) diameter: (XXXFOHAPA).

Right Angle Mirror (XXXCIACRA)

Connects to Optical Head.

Sighting Tube Conduit Accessory (XXXFOSTCA)

Length: 300mm (12 in); Diameter: 32mm (1.25 in) with connection to standard electrical conduit.

Rooftop Mounting/Purging

Available with flange (XXXFORFMF) or gravity-held base (XXXFORFMC) with quick-release fitting for Optical Head, sapphire window, stainless steel pipe-cap or flanged mounting base.

NIST Calibration Certification XXXFRCERT

Power Supply (24VDC, 110/220VAC input) and Marathon Terminal Block mounted in a NEMA 4 (IP65) enclosure **(RAYMAPB)**

Power Supply 24VDC 1.1A Switching power supply with universal input (110/220V) (XXX2CDCPSS)

Spare Marathon Terminal Block Accessory (XXXMATB)

Spare Marathon Terminal Block in a NEMA-4 enclosure (XXXMATBN4)

SMART RS485/RS232 CONVERTERS

DB25 to Terminal Strip Interface Converter, recommended for direct wiring between a serial interface and the Marathon terminal block (XXX485CVT)

TEFLON 12-CONDUCTOR CABLE (XXXHTCB □□)


High temperature (200°C rated), 12-conductor Teflon jacketed cable suitable for providing connections to all inputs/outputs of the FR/FA electronics. The cable is cut to specified lengths. One end of the 12-conductor cable has its wires stripped and prepared for termination into the FR/FA terminal strip.

Cable length (in meters) = 1,3,5,10,15,20,...,60

PVC 4-CONDUCTOR CABLE (XXXLTCB)

For installations requiring only 24VDC and 0/4-20mA output, 4-conductor PVC wiring cables (2 twisted pairs; each pair shielded) provides connection to 24VDC power, ground, and the +mA and -mA output of the FR/FA electronics. Nominal temperature rating is -20°C to 60°C. the cable is cut to specified lengths (see below). One cable end has wires stripped and prepared for termination into the FR/FA terminal strip.

Cable length (in meters) = 1,3,5,10,15,20,...,60



	. talligo	op.io		ор	орион	Fiber Cable
Model	Description					
RAYFR1	Raytek Fiber-optic Ratio The	ermometer				
Code A	Temperature Range					
A	500°C to 1100°C (932°F to 2012°F) minimum temperature specified at 50% attenuation; D:S≥ 20:1					
В	700°C to 1500°C (1292°F to 2732°F) minimum temperature specified at 50% attenuation; D:S≥ 40:1					
С	1000°C to 2500°C (1832°F to 4532°F) minimum temperature specified at 50% attenuation; D:S≥ 65:1					
Code B	Focus Option					
SF0	Standard Focus Head-focus	s distance: ∞				
CF1	Close Focus Head-focus dis	stance: 100mm (4 in	ch)			
CF2	Close Focus Head-focus dis	stance: 300mm (12 i	inch)			
Code C	Fiber Cable Length					
01	1m (≈ 3') length fiber-optic o	cable with connector	-			
03	3m (≈ 10') length fiber-optic	cable with connecto	or			
06	6m (≈ 19.7') length fiber-opt	ic cable with connec	ctor			
10	10m (≈ 32.8') length fiber-op	otic cable with conne	ector			
Code D	Laser Aiming Option					
L	NOTE: Laser aiming option	available only on FR	1A and FR1B models	3		
Code E	Cooling Platform Option					
W	Water cooled mounting plat	form for FR1 housing	g			
Code F	High Temperature Fiber Ca	able				
Н	Rated to 315°C (600°F); opt	ion excludes Viton S	Sheath and NEMA-4 i	rating		
Typical Model Number	RAYFR1BCF103LW					

Raytek Automation Products: Noncontact Temperature Measurement for Industrial Applications

Raytek Corporation Worldwide Headquarters 1201 Shaffer Rd. PO Box 1820

Santa Cruz, CA 95061-1820 USA Tel: 1 800 866 5478 1 831 458 1110

Fax: 1 831 458 1239 solutions@raytek.com

To find a Raytek office near you please visit www.raytek.com

Worldwide Service

Raytek offers services including emergency repairs and calibration. For more information, contact your local office or e-mail: support@raytek.com







www.raytek.com

for up-to-the-minute features



Calle 16 Nro. 4924 - Berazategui (1884)

Buenos Aires - Argentina Tel/Fax 256-1946 / 0476